


# T1 SERIES LIGHT TUBE

Product name	Prolucent T1
Description	Linear single color low voltage light tube
Benefits	Cost efficient , reliable, easy to install, versatile
Material	PMMA with PVC ends
IP rating	IP69K
Connectors	Interconnectable system : 2 pin connector
Dimensions	See drawing. A: 1830 mm (720,5") , B: 2540 mm (1000")
Voltage	24V and 48V version available
Power	5,5 W and high output 9,6W versions
Working temperature	45°C , 113°F
Protection	internal resettable fuse Internal backwire of 1,5mm <sup>2</sup> (16 AWG) Low resistance connectors
Lens	Frosted
Leds	72 leds driven at low current
Dimmable	0-100%
Lumen output	See product list
Color output	Different led colours available
Accessories	Mounting clamps , cabling, dimmers

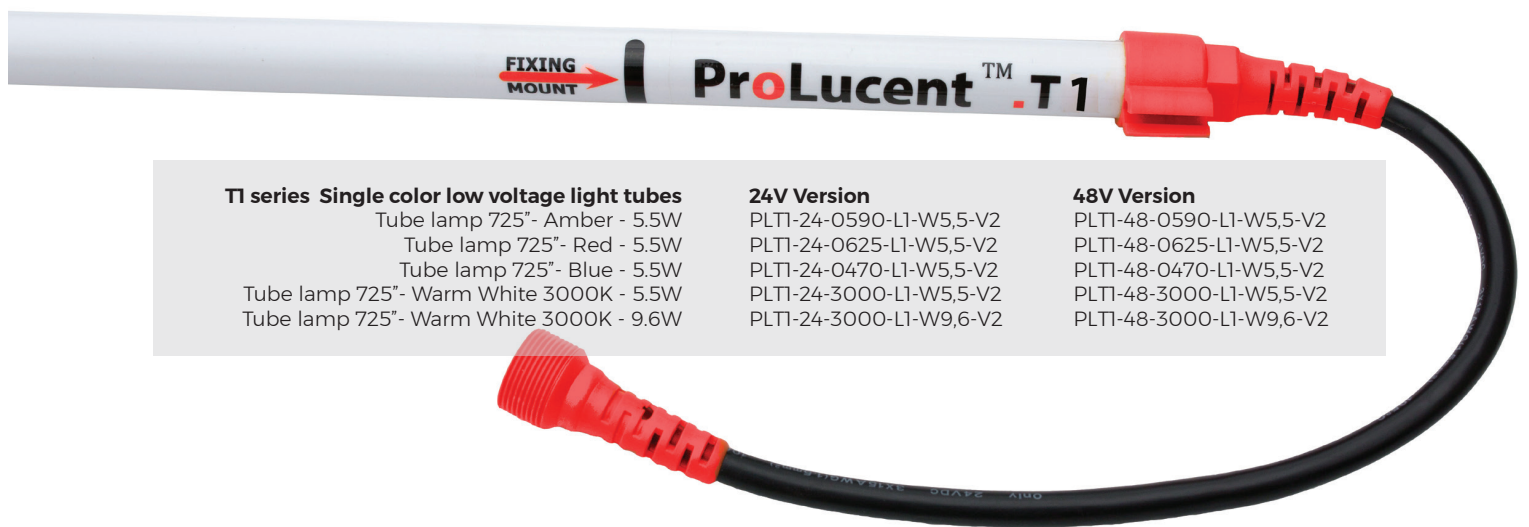

### T1 series Single color low voltage light tubes

- Tube lamp 725"- Amber - 5.5W
- Tube lamp 725"- Red - 5.5W
- Tube lamp 725"- Blue - 5.5W
- Tube lamp 725"- Warm White 3000K - 5.5W
- Tube lamp 725"- Warm White 3000K - 9.6W

### 24V Version

- PLTI-24-0590-L1-W5,5-V2
- PLTI-24-0625-L1-W5,5-V2
- PLTI-24-0470-L1-W5,5-V2
- PLTI-24-3000-L1-W5,5-V2
- PLTI-24-3000-L1-W9,6-V2

### 48V Version

- PLTI-48-0590-L1-W5,5-V2
- PLTI-48-0625-L1-W5,5-V2
- PLTI-48-0470-L1-W5,5-V2
- PLTI-48-3000-L1-W5,5-V2
- PLTI-48-3000-L1-W9,6-V2

### 24V or 48V

